

STINGATOR MOBIL CU SPUMA FARA FLUOR

PRESURIZAT PERMANENT

MODEL FM50T-30

FOCAR - A II B

FM50T-30



UTILIZABIL LA
TEMPERATURI
NEGATIVE

SPECIFICATIE TEHNICĂ

Greutate totală 80 KG
Agent de stingere
MOUSSEAL FAB F-30 #1073
Masă agent 50 L
Temperatură lucru: - 30°C ... + 60°C

CERTIFICĂRI, STANDARDE, AVIZE



TECHNICKA INSPEKCIA
EU TYPE Modul B 2014/68/EU, EN 1866-2



TUV SUD TUV Rheinland
EC TYPE, Modul B - Valvă



CERTKOM
ISO 9001





MIRTEC S.A.
EN 1866 - Stingator

- | | | |
|---|--------------------------|-----------------------|
| 1 | CILINDRU | Cod: RON-FM50T-30-c |
| | - Volum | 67.5 L + 0.3 |
| | - Presiune testare | 30 bar |
| | - Presiune maxima admisă | 20 bar |
| 2 | VALVĂ | Cod: ZX-1T-02-00-B |
| | - Disc spargere | 22 - 26 bar |
| 3 | FURTUN | Cod: RON-FM50T-30-f |
| | - Material | EPDM |
| 4 | TUB INTERIOR | Cod: RON-FM50T-30-t |
| | - Material | PVC |
| 5 | MANOMETRU | Cod: ZX-008-100 |
| | - Diametru | 36 mm |
| 6 | PISTOL REFULARE | Cod: RON-FM50T-30-p |
| | - Material | PVC |
| 7 | ȘTUȚ | Cod: RON-FM50T-30-srs |
| | - Material | PVC |
| 8 | CĂRUCIOR | Cod: RON-FM50T-30-sc |
| | - Material | Teava metal |
| 9 | ROATA | Cod: RON-FM50T-30-rsc |
| | - Material | PVC, CAUCIUC |
| | ETICHETĂ | Cod: RON-FM50T-30-e |



CE
1354

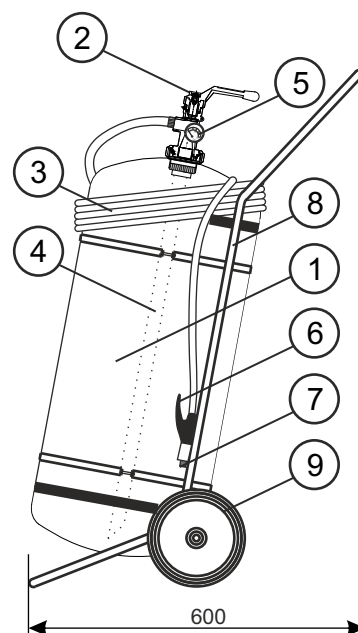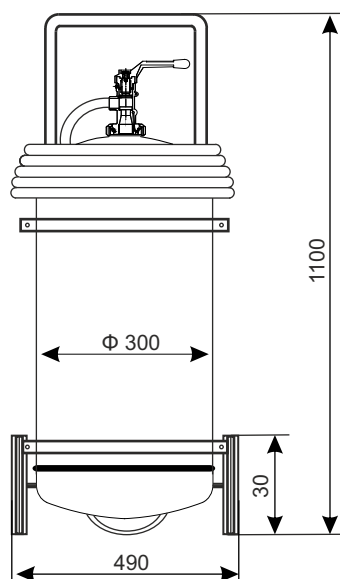

Producator:
RON Protect Solutions SRL
WWW.ROPNS.RO
0799.588.901

RON

Fișă tehnică
Stingător model
FM50T-30

Cod: FT - FM50T-30, v1.0