

STINGATOR PORTABIL CU **SPUMA FARA FLUOR** PRESURIZAT PERMANENT

FM6T-30

MODEL FM6T-30
FOCAR - 27 A 113 B

SPECIFICATIE TEHNICĂ

Greutate totală 10,0 KG
Agent de stingere MOUSSEAL FAB F-30
Masă agent 6 L
Temperatură lucru: - 30°C ... + 60°C

CERTIFICĂRI, STANDARDE, AVIZE



TECHNICKA INSPEKCIA
EU TYPE Modul B 2014/68/EU, EN 3-8



TUV Rheinland
EC TYPE, Modul H - Valvă




MANAGEMENT CERTIFICATION
ISO 9001, 14001




MIRTEC S.A.
EN 3-7 - Stingator

**UTILIZABIL LA
TEMPERATURI
NEGATIVE**

- 1** CILINDRU Cod: RON-FM6T-30-c
- Material DC 01/03
- Presiune testare 30 bar
- Presiune maxima admisă 20bar
- 2** VALVĂ Cod: RON-ZX-2B-07-00G-E
- Material CuZn40Pb2
- Disc spargere 22-27 bar
- 3** FURTUN REFULARE Cod: RON-FM6T-30-f
- Material EPDM
- 4** TUB INTERIOR Cod: RON-FM6T-30-t
- Material PVC
- 5** MANOMETRU Cod: RON-ZX-Mp
- Material HPb59-1
- 6** ETICHETĂ Cod: RON-FM6T-30-e

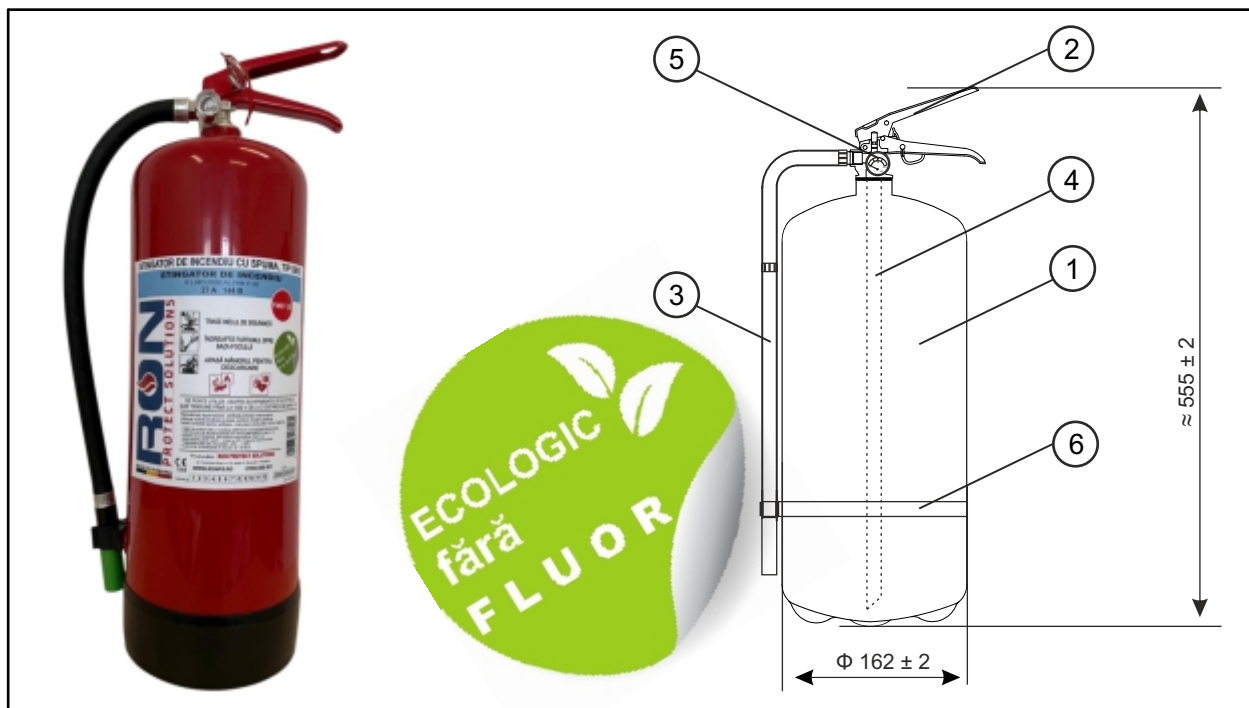

Producator:
RON Protect Solutions SRL
WWW.ROPNS.RO
0799.588.901

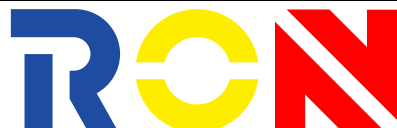

Fișă tehnică
Stingător model
FM6T-30

Cod: FT - FM6T-30, v1.0