

STINGATOR PORTABIL CU **SPUMA FARA FLUOR** PRESURIZAT PERMANENT

FM9T-30

MODEL FM9T-30
FOCAR - 27 A 183 B

**UTILIZABIL LA
TEMPERATURI
NEGATIVE**

SPECIFICATIE TEHNICĂ

Greutate totală 14,0 KG
Agent de stingere MOUSSEAL FAB F-30
Masă agent 9 L
Temperatură lucru: - 30°C ... + 60°C

CERTIFICĂRI, STANDARDE, AVIZE



TECHNICKA INSPEKCIA
EU TYPE Modul B 2014/68/EU, EN 3-8



TUV Rheinland
EC TYPE, Modul H - Valvă




MANAGEMENT CERTIFICATION
ISO 9001, 14001




MIRTEC S.A.
EN 3-7 - Stingator

- 1 CILINDRU** Cod: RON-FM9T-30-c
- Material DC 01/03
- Presiune testare 30 bar
- Presiune maxima admisă 20bar
- 2 VALVĂ** Cod: RON-ZX-2B-07-00G-E
- Material CuZn40Pb2
- Disc spargere 22-27 bar
- 3 FURTUN REFULARE** Cod: RON-FM9T-30-f
- Material EPDM
- 4 TUB INTERIOR** Cod: RON-FM9T-30-t
- Material PVC
- 5 MANOMETRU** Cod: RON-ZX-Mp
- Material HPb59-1
- ETICHETĂ** Cod: RON-FM9T-30-e

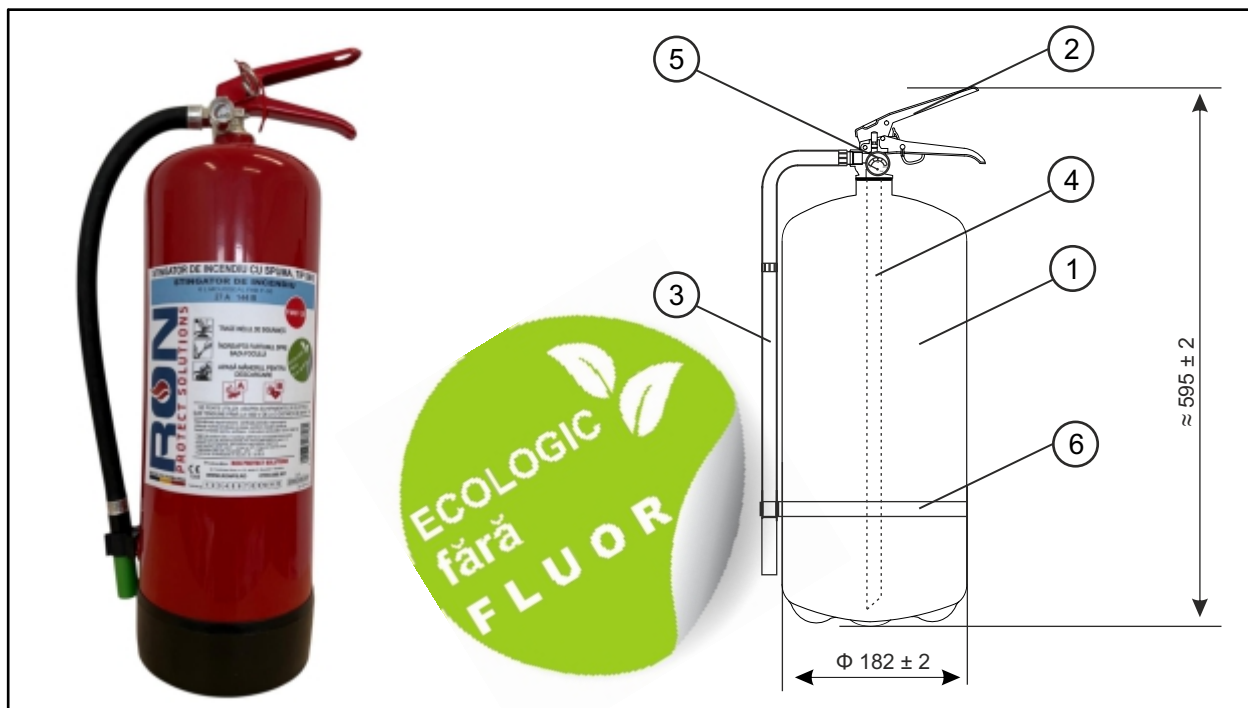

Producator:
RON Protect Solutions SRL
WWW.ROPNS.RO
0799.588.901

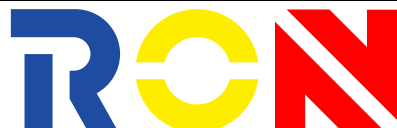

Fișă tehnică
Stingător model
FM9T-30

Cod: FT - FM9T-30, v1.0